

TO24-JD3-AA01

ORv3 JBOD - Single-Path, 32 x SATA/SAS-3



Features

- 20U Rackmount, ORv3
- 32 x 3.5"/2.5" SATA/SAS-3 bays
- 2 x Broadcom SAS4x32 expanders
- 4 x Mini-SAS HD ports
- ASPEED® AST2520 Remote Management Controller

Specification

Dimensions 20U
W537 x H93 x D807.7 mm

Open Rack Version ORv3

LAN Upper tray: 1 x 10/100/1000 Mbps Management LAN
Lower tray: 1 x 10/100/1000 Mbps Management LAN

Storage Front accessed
Upper tray: 16 x 3.5"/2.5" SATA/SAS-3
Lower tray: 16 x 3.5"/2.5" SATA/SAS-3

SATA Supported

SAS Support SAS 12Gb/s

SAS Expander Upper tray:
1 x Broadcom SAS4x32 expander, single-path
Lower tray:
1 x Broadcom SAS4x32 expander, single-path

Front I/O 4 x Mini-SAS HD ports
2 x MLAN ports
1 x UART audio jack
1 x Power button with LED
1 x ID button with LED
1 x BMC reset button
1 x System status LED
1 x MLAN access LED

System Management ASPEED® AST2520 Remote Management Controller


System Fans 4 x 92x92x38mm (9,700rpm)

No. of Bus Bars 1 x 48V Bus Bar

Packaging Dimensions 1165 x 764 x 282 mm

Packaging Content 1 x TO24-JD3-AA01

Part Numbers Barebone package: 6NTO24JD3MR000AA01*

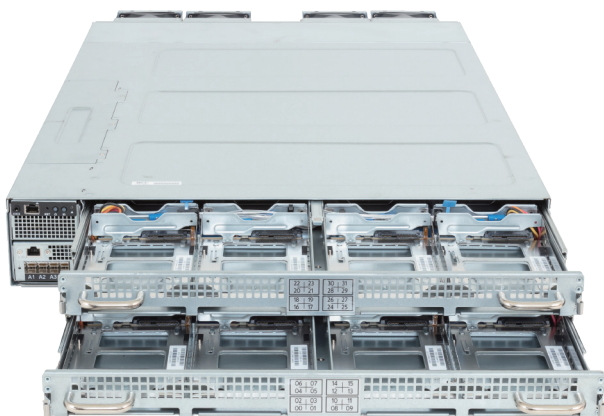

Learn more at <https://www.GIGABYTE.com/enterprise>

* All specifications are subject to change without notice. Please visit our website for the latest information.
* All trademarks and logos are the properties of their respective holders.

© 2025 Giga Computing Technology Co., Ltd. All rights reserved.

Designed by

